

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

28 NOV 2001

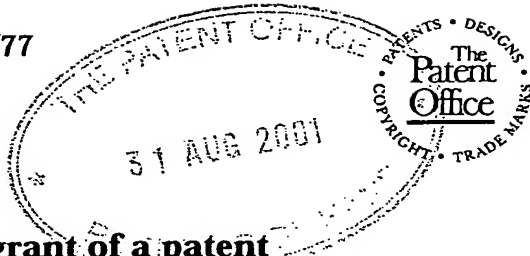

03SEP01 502689645 D02246
P01/7700 0.00-0121197.8

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

31 AUG 2001

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P010145GBP

2. Patent application number

(The Patent Office will fill in this part)

0121197.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

SONY UNITED KINGDOM LIMITED
THE HEIGHTS
BROOKLANDS
WEYBRIDGE
KT13 0XW

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

65227000001

4. Title of the invention

MODIFYING MATERIAL

5. Name of your agent (if you have one)

D Young & Co

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

21 New Fetter Lane
London
EC4A 1DA

Patents ADP number (if you know it)

59006

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

GB

0029850.5

07.12.00

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 19

Claim(s) 10

Abstract 1

Drawing(s) 8

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3

Request for preliminary examination and search (Patents Form 9/77) 0

Request for substantive examination (Patents Form 10/77) 0

Any other documents 1 x Form 23/77
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *D Young & Co* Date 30 August 2001
D Young & Co (Agents for the Applicants)

12. Name and daytime telephone number of person to contact in the United Kingdom Richard Pratt 023 8071 9500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Patents Form 7/77

Patents Act 1977
(Rule 15)



7/77

**Statement of inventorship and of
right to grant of a patent**

31 AUG 2001

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P010145GBP

2. Patent application number
(if you know it)

0121197.8

3. Full name of the or of each applicant

SONY UNITED KINGDOM LIMITED

4. Title of the invention

MODIFYING MATERIAL

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent

BY VIRTUE OF AN ASSIGNMENT DATED 14 DECEMBER 2000
BETWEEN OURSELVES AND THE OVERRNAMED INVENTORS.

6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))

7.

I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

Signature

Date 30 August 2001

D Young & Co (Agents for the Applicants)

8. Name and daytime telephone number of
person to contact in the United Kingdom

Richard Pratt

023 8071 9500

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Surname: <u>PELLY</u>
First Names: Jason Charles
2 Odell Close Lower Earley Reading Berkshire RG6 4DU United Kingdom
7972672001
Patents ADP number (if you know it):

Surname: <u>KEATING</u>
First Names: Stephen Mark
28 Huntingdon Close Lower Earley Reading Berkshire RG6 3AB United Kingdom
4074324001
Patents ADP number (if you know it):

Surname: _____
First Names: _____
Patents ADP number (if you know it):

Reminder

Have you signed the form?

Modifying Material

The present invention relates to modifying material. Preferred embodiments of the invention relate to perceptible modification.

5 "Material" as used herein means information material which includes at least one or more of image material, audio material and data material. Image material is generic to still and moving images and includes video and other forms of information signals representing images.

It is known to watermark material. A watermark may be data embedded in material as a watermark. A watermark may be perceptible or hidden. Preferred
10 embodiments of the present invention use perceptible watermarks.

It is also known to watermark an image by transforming the image from the spatial domain to a transform domain, e.g. to the wavelet domain and embed a watermark by changing the wavelet coefficients. The transform domain image with the watermark is then inverse transformed to the spatial domain. See for example "An
15 image watermarking method based on the wavelet transform" by Hisashi Inoue, et al, IEEE, 0-7803-5467-2/99.

US Patent 5809139 (Girod et al) discloses the invisible watermarking of video material which is already compressed. Video which has been compressed by MPEG2 is entropy decoded and dequantised to obtain the DCT coefficients. A spread spectrum
20 spatial domain watermark is transformed to the DCT domain and the transformed watermark added to the DCT coefficients of the transformed video. To maintain the bit rate of the compressed video even with the addition of the watermark, various steps are taken. Only non-zero coefficients are modified. Also the number of bits of an encoded watermarked coefficient is compared against the number of bits of the
25 coefficient prior to watermarking (plus any extra number of spare bits saved in previous coding operations). A control controls selection of the output between the watermarked bitstream and the original unwatermarked bitstream. If an entropy encoded unwatermarked coefficient uses n_0 bits and the watermarked entropy encoded coefficient uses n_1 bits then a watermarked coefficient is output if $n_1 \leq n_0 + n_3$, where
30 n_3 is the number of spare bits available for use. The watermark can be detected in a

video decoder but it is not possible to restore the watermarked video to the original video by reversing the watermarking algorithm.

WO 99/10837 (Digimarc) discloses a method of watermarking a video image in which the image is compressed using for example MPEG2 and the DCT coefficients are modified to embed a watermark. The bit rate is preserved by maintaining a count that represents the amount the bit rate has been increased by the modifications to the coefficients less the amount the bit rate has been decreased by the modifications. If the cumulative change exceeds a positive or negative limit, then no further changes are made. The watermark can be detected in a video decoder but it is not possible to restore the watermarked video to the original video by reversing the watermarking algorithm.

Both US-A-5809139 and WO 99/10837 require means which monitor the bit rate and which stops embedding of a watermark if a specified limit is reached. For US-A -5809139 and WO 99/10837 that results in a random distribution of the watermark in an image. These proposals are aimed at irreversible imperceptible watermarks which embed data representing a message in the image.

It is known to compression encode material especially images. Also, if a modification is made to the material which adds data to the material, then the compression is usually less efficient. It is desirable to process compressed material, so as to produce modification of the material which is perceptible in the decompressed material, e.g. a visible modification in an image, with a minimal change to the number of bits representing the compressed material. Preferably it is desirable to modify material in a way which is easily applicable to both material which is already compressed and material which is to be compressed.

According to one aspect of the present invention, there is provided a method of modifying material represented by information signals, comprising deriving digital representations of transform coefficients of the signals, and modifying and entropy encoding the digital representations, wherein at least some of the digital representations are modified by making pseudo random changes to them in accordance with a substantially invertible algorithm, which changes do not substantially change the number of entropy encoded bits.

The term "not substantially change the number of entropy encoded bits " indicates that the number of bits may increase or decrease by a small amount relative to the number of bits of entropy encoded unmodified material and preferably the number of bits does not change.

5 "Pseudo random changes" may be applied by encrypting, transposing or permuting the bits of coefficients or groups of coefficients in accordance with pseudo random numbers derived from keys.

 The method is easily applicable to both compressed and uncompressed material because it is applied to transformed coefficients . That is particularly advantageous for
10 compressed material having a bit stream containing codes representing the coefficients

because only extraction of the codes from the entropy encoded bitstream is needed before a modification is made. By modifying according to an invertible algorithm, the modification may be removed and the original material restored which is not possible in the prior proposals of Girod and Digimarc as described above.

15 Some embodiments of the invention apply a modification by transposing the values of representations with other values in accordance with a transposition algorithm. By suitably choosing the values which are transposed, the use of such transposition allows material to be modified without substantial change to the number of entropy encoded bits . Preferably, the number of bits does not increase. However in
20 some circumstances, there may be a small increase or decrease in the number of bits.

 In an embodiment of the invention which compresses material, by combining the application of the modification and compression, the compression does not damage the modification. Also by not substantially changing the number of bits used, the bandwidth (data rate) of the compressed and modified material is not substantially
25 changed.

 By using an invertible algorithm, the modification is removable and the original material restored provided that the modified material is not processed or otherwise altered in a way that irreversibly alters the changed compression encoded data.

30

The invention also provides apparatus for carrying out the method of said one aspect.

Another aspect of the invention provides a method of removing modifications applied to information signals representing material by the method of said one aspect, comprising deriving a bitstream representing entropy encoded digital representations of transform coefficients of the modified material, and extracting from the bitstream codes the coefficients and applying the inverse of the invertible algorithm thereto.

The invention also provides a computer program product arranged to implement the method of the said another aspect when run on a computer.

10 The invention also provides apparatus for carrying out the method of said another aspect.

It will be appreciated from the following description that the illustrative embodiments of the invention do not embed data representing a message in the material. The embodiments change selected coefficients or blocks of coefficients dependent on a bit map. The bit map may represent a pattern. However, the modifications made at the positions indicated by the bit map do not represent intelligible data.

For a better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

20 Figure 1 is a schematic block diagram of a video signal processor embodying the invention;

Figure 2 explains how an image is changed by the processing of the system of Figure 1;

25 Figures 3A and 3B schematically illustrate the contents of frame stores of the system of Figure 1;

Figure 4 is a flow chart illustrating the processing of DC transform coefficients;

Figure 5 illustrates the encoding of DC coefficient values;

30 Figures 6, 7, 8 and 9 are flow charts illustrating the processing of AC transform coefficients;

Figure 10 is a schematic diagram of a smart card;

Figure 11 is a schematic block diagram of a decoder embodying the invention;

Figure 12 is a schematic flow diagram corresponding to Figure 6 illustrating the restoration of AC coefficient values;

Figure 13 an example of a watermarked image produced in accordance with the invention; and

5 Figure 14 is a schematic flow diagram of an illustrative system in accordance with the invention for processing video from a source of compressed video.

Overview

The embodiments of the invention described herein apply modifications, herein referred to as a watermark, to an image. Figure 13 is an example of a watermarked image produced by an embodiment of the invention. As will become apparent from the following illustrative description, although the overall effect of the modifications shown in Figure 13 is a pattern of an intelligible shape (SONY), the modifications themselves do not represent data. Furthermore the pattern itself need not be intelligible

Encoder, Figure 1.

Figure 1 is an example of an encoder. The encoder of Figure 1 is for example a high definition camera/recorder which includes an image compression system. The encoder comprises a source 1 of a color analogue image and an analogue to digital converter and processor 2 which samples the image according to the well known 4:2:2 format. As shown in Figure 2, a frame of the luminance component image has 1920 samples in each of 1080 lines. The processor 2 filters the image and outputs a 3:1:1 subsampled image. The luminance (Y) component has 1440 digital samples on each of 1080 lines as shown in Figure 2b. A demultiplexer 3 separates odd and even samples onto separate odd and even channels. Thus as shown in Figure 2c, a frame of even Y samples has 720 samples on each of 1080 lines. A frame of odd samples is the same.

In this example, the encoder is part of a camera/recorder. Blocks of odd and even samples corresponding to DCT blocks described below are shuffled according to a known shuffling algorithm in processors 4o and 4e. The odd and even samples are recorded on separate tracks of a video tape in known manner. Shuffling is performed to minimise the effect of tape defects on an image reproduced from the tape, as is well known in the art. Shuffling is also used to improve shuttle playback. Shuffling is not essential to the invention.

Each frame of odd and even shuffled digital samples, represents a spatial domain image. The odd and even frames are transformed to the DCT domain by respective transformers 5o and 5e. As shown in Figure 2d, each transformed frame of odd or even Y samples comprises 90 by 135 DCT blocks, each block comprising 8 by 8 DCT coefficients as shown in Figure 2e. Each DCT block has one DC coefficient

denoted DC in Figure 2e and 63 AC coefficients, one example of which is denoted by AC in figure 2e.

The DCT coefficients are quantised in quantisers 6o and 6e, the quantisation being controlled by a control value Q in known manner. In the absence of watermarking, the odd and even frames of quantised DCT coefficients are entropy encoded in entropy encoders 8o and 8e in known manner. The entropy encoding in this example includes encoding using Huffman encoding. The entropy encoded quantised coefficients are in this example recorded in known manner on a tape: that is not shown in Figure 1. Recording could be on other recording media, for example discs.

Modifying the quantised DCT Coefficients to apply the watermark.

The odd and even channels of the encoder have change processors 7o and 7e which modify the quantised luminance (Y) DCT coefficients to apply the watermark. The following description refers to only one, 7, of the processors. The other processor operates in the same way. The following assumes by way of example that the quantised DCT coefficients are represented by n bit numbers where n is in the range 8 to 14; that is DC coefficients may have 8 to 14 bits; and AC coefficients have 14 bits. For ease of description the following refers to n bit numbers.

Defining the form of the watermark.

Referring to Figure 3A and to Figure 13, the form of the watermark is defined by a bit map stored in a frame store 9a of the change processor 7. The bit map contains data selecting the DCT blocks in which coefficients are to be changed to apply the watermark. For example a bit value 0 in a location on the store 9A indicates the a DCT block in a corresponding location in the image is not to be changed whereas bit value 1 selects the block for change.

In a preferred embodiment there are two such stores. One selects DCT blocks in which AC coefficients are to be changed and the other selects blocks in which the DC coefficient is to be changed. Most preferably the selections made by the two stores are independent. The stores 9 are referred to hereinafter as template stores. The following description assumes that DC coefficients are processed differently to AC coefficients. In an alternative embodiment only DC coefficients are changed to apply a

watermark. In a further embodiment only AC coefficients are changed to apply a watermark.

For ease of explanation and ease of illustration, the bit maps shown in Figures 3A and 3B assume that the digital samples have not been shuffled.

5 Processing DC coefficients, Figures 4 and 5.

Referring to Figure 3B, the change processor 7 has a change function store 9B which stores a change value C for the DC coefficient of each DCT block selected by the bit map in the DC template store 9A.

10 Referring to Figure 4, the change value C is calculated by the processor 7 in the following way.

S1. The DC template of Figure 3A is created. Different levels L may be specified for different parts of the watermark as illustrated in Figure 3A. L is defined by a 8 bit number and so it has values in the range 0 to 255. In Figure 3A L has values 5 and 127 by way of example for different parts of the template. The levels may be
15 stored in the DC template.

S2. Pseudo random numbers RN1 are generated based on a first key, Key1. The numbers RN1 are constrained within a predetermined range $\min \leq \text{RN1} \leq \max$ for example $100 \leq \text{RN1} \leq 1000$. A new random number is generated for each DCT block which is to have its DC value changed (as indicated by the DC template).

20 S3. The change values C are calculated according to

$$C = (L/M) \cdot \text{RN1}$$

where M is the maximum value which L can take: in this example M=255. The change values are stored in the change store 9B.

It will be recalled that the same process occurs in both the even sample change
25 processor 7e and the odd one 7o. However, the quantisation scales applied to the odd and even channels may be different. Thus different changes could be applied to even and odd samples. That would produce a striped image. If a striped image is not wanted, step S4 is implemented but step S4 is not essential to the invention.

Steps S1 to S3 may take place before an image is compressed and
30 watermarked. The adjustment of the change values C by step S4 takes place during compression processing because it depends on the particular quantisation scales applied to the odd and even samples during such processing.

S4. The digital change value C is adjusted as follows to produce an adjusted value C^\wedge where

$C^\wedge = C \gg (13 - B)$, where B is the number of bits needed to specify the DC magnitude after quantisation, and \gg means right shift in this case (by $(13-B)$ bits).

- 5 That occurs in both the odd and even channels and results in approximately the same change being applied in both channels. There may be different values for B on the odd and even tracks B_o and B_e . 13 is the number of magnitude bits of a signed 14 bit number, the extra bit being a sign bit.

10 S5. The quantised DC coefficients are then adjusted by the values C^\wedge

according to an invertible algorithm. The quantised DC coefficients each have n bits, where n may differ from DC coefficient to DC coefficient. The change is such that for any coefficient the number n of bits does not change.

- Figure 5 illustrates a currently preferred algorithm (algorithm 1) for changing
15 the DC coefficient values. Assume by way of example that $C^\wedge=10$ and $n=8$ bits so the coefficient has a value in the range -128 to $+127$. Starting at -128 , the bottom of the range, the range of values is divided into sections each of range 2×10 . Sections -128 to -109 ; -108 to -89 ; and so on to $+111$ are shown. The whole range does not divide into an integer number of sections each of range 2×10 . Thus there is a top section of
20 $+112$ to $+127$.

- The algorithm operates by swapping a value in the top half of a section with a value in the bottom half. Thus values -128 to -119 swap with values -118 to -109 . Thus if a coefficient has an original value -118 , before adjustment by $C^\wedge=10$, it is replaced by -128 after adjustment by C^\wedge . As another example if an original value is $-$
25 107 , it becomes -97 after adjustment. In the top section $+112$ to $+127$ the same process occurs but the half sections are $+112$ to $+119$ and $+120$ to $+127$ and the swapping is as shown in the Figure.

- The example given divides the whole range into sections beginning at the bottom (-128) of the range. The division may take place starting at the top ($+127$) of
30 the range. In a preferred embodiment, the division begins at the top or bottom according to the value of a pseudo randomly generated bit PRB generated based on a

key, Key2. PRB may pseudo randomly change for every DC coefficient. The values of the bit PRB are preferably stored in the change store together with C.

When a quantised DC coefficient is produced by the quantiser Q, the processor 7 determines from the change store the value of C applicable to the coefficient and the value of PRB. The processor 7 adjusts the value of C to C^{\wedge} . The value of that coefficient is adjusted according to C^{\wedge} and the algorithm. Using the example of Figure 5, if the coefficient has an original value of -96 it is replaced by -106.

In summary, the n bit numbers representing the coefficients are members of a set and a said number is modified by transposing it with another member of the set chosen according to the invertible algorithm. As shown in Figure 5, if a number N1 is to be changed by an amount X it is transposed with another member N2 of the set where $|N1-N2| = X$, except at one end of the range where only a change of less than X is possible.

It will be appreciated from the foregoing that the number of bits is not changed.

S17, S18. The foregoing description may apply to a single frame of a still image. For video with many frames in a clip, the change values C and PRB stored in the store 9B are applied to all the frames in the clip. However in addition, to increase security, a small pseudo random variation RN2 based on a key Key5 is added to the change values C of each frame. The small variation is chosen so that the number of bits does not increase. At step S3, the change store is established and remains fixed for the clip. The small variation is a small pseudo random number e.g. -50 \leq RN2 \leq 50, and it is added to C just prior to step S4. Each C gets a new value of RN2. The PRBS generating RN2 is *not* reset every frame, so different frames have different sequences of RN2.

Processing AC coefficients, Figures 6 to 9.

S6. An AC template is created. The bit map in the AC template selects the DCT blocks in which AC coefficients are to be changed.

S61. If an AC coefficient is to be changed its value is tested; if it equals zero, no change is made to its value; otherwise it is changed.

S7, S8 and S9. The AC coefficients in the selected blocks are compared with a threshold Ts. If the magnitude of a coefficient is below Ts then its sign may be changed. If the value is greater than Ts the sign must not change. Although it is not

essential to the principle of the invention to prevent a sign change in an AC coefficient, it has been found that a sign change for large valued coefficients creates a watermark which is unpleasant.

5 S10. The numbers representing the AC coefficients are changed according to an invertible algorithm and a key, Key3.

Figure 7 illustrates one example of the invertible algorithm (algorithm 2). The algorithm operates on quantised AC coefficients prior to entropy encoding.

Referring to Table 1, which is a Huffman encoding table and which is attached to the end of this description, the coefficient values are represented by a
10 variable length code VLC and a fixed length code FLC. The VLC specifies which of the groups an AC coefficient lies in. The FLC is an index which indicates which value in the group is equal to the AC coefficient

Step S11 determines which group the coefficient lies in.

Step S111 determines the index of the coefficient in the group.

15 In step S12 the fixed length code of AC coefficients in blocks selected by the AC template is changed by adding to it a pseudo random number RN3 based on a key, Key3. To ensure that the number of bits does not change the sum "wraps round". For example if the fixed length code is 110 and the RN3 is 010 then the sum wraps round to 000 rather than 1000. If no change of sign is to occur as indicated by steps S7 and
20 S9, then the wrap around is performed so as to preserve the sign of the coefficient.

In Step S121 the coefficient value is set to the value pointed to by the new index.

Figure 8 illustrates another example of the invertible algorithm. The algorithm operates in the same way as Figure 7 except step S12 is replaced by step S13.

25 In step S13 the fixed length code is encrypted according to an invertible encryption code and a key Key3'. The number of bits is not changed.

Figures 7 and 8 are concerned with changing the value of a coefficient to another value in the same magnitude group.

Figure 9 illustrates an invertible algorithm for changing the order of
30 coefficients. This may be used in addition to the algorithm of Figure 7 or 8.

S14. The number of bits to entropy encode a sequence of AC coefficients is determined.

S15. The change processor 7 attempts to find a permutation of the order of coefficients which does not change the number of bits produced by entropy encoding.

S16. If a permutation is found, then a decision is made to either change the order or not change the order. The decision depends on the value of a pseudo random
5 number PRB2 defined by a key Key4. In this example the number may have only one bit.

In a modification of step S15, the change processor finds more than one permutation of the order of coefficients which does not change the number of bits produced by entropy encoding. The permutations, including the original order of
10 coefficients are numbered to identify them. In step S16, one of the permutations is selected on the basis of the pseudo random number PRB2.

In a modification of the process, the AC coefficients in a block are selected for change. In such a block not all coefficients are changed. The selection may be a preset fixed selection or a selection which varies. The selection may be
15 pseudo random based on a key.

Creating watermarked spatial domain images.

The compressed watermarked image may be stored in compressed form on the tape. To view the image it must be decompressed.

Referring to Figure 11, the Figure shows only the "odd" channel of the
20 decoder. The "even" channel is similar. The compressed image is entropy decoded (18), dequantised (16) and inverse transformed (15). The resulting spatial domain samples are unshuffled (14) and the odd and even samples remultiplexed (13) to produce a watermarked spatial domain image. The remultiplexed samples are inverse
filtered (12) to produce a 4:2:2 image. Figure 13 is an example of such an image.

25 It will be noted that a watermark removal processor 17 of Figure 11 is bypassed by bypass 19 for the purpose of viewing the watermarked image.

Removing the Watermark.

Data Carrier, Figure 10

In order to remove the watermark, the decoder must have the following
30 removal data:

The AC and DC templates, levels L, the maximum and minimum values for RN1, the keys 1, 2, 3, 4 and 5 for generating the pseudo random numbers and bits, the

algorithms 1 and 2 and the threshold T_s . The keys are generated in the encoder and are not predetermined.

In the currently preferred embodiment, the removal data is stored in a data carrier preferably securely. Most preferably the carrier is a smart card SC. The encoder has an interface via which the change processors 7e and 7o download the removal data into the smart card SC.

The removal processors 17 of the decoder have a similar interface for receiving the removal data from the smart card SC.

Removal of changes from the DC coefficients

Referring to Figures 4 and 11, the removal processor 17 downloads the DC template, Key1 and the limits to the range of RN1 from the smart card SC.

S1. The templates and levels L are available from the smart card.

S2. The removal processor 17 recreates, from the Key1 and the limits, the pseudo random numbers RN1.

S3. The changes C are recalculated from the template, L and RN1. and stored in a change store as shown in Figure 3B.

S4. The adjusted change values C^{\wedge} are calculated from the stored values of C..

S5. The DC coefficients are restored to their original values by inverting the algorithm with reference to the pseudo random bits PRB1 regenerated from Key2.

S17, S18. For video clips, RN2 is regenerated from Key5 and subtracted from C.

Restoring AC coefficients

Referring to Figure 12:

S6'. The AC template is downloaded from the smart card.

S61'. If an AC coefficient is to be changed, the coefficient is tested to determine whether or not it has a value of zero. If the value is non zero then it is subject to change at the encoder and thus also at the decoder.

S10'. The AC coefficients are restored to their original values by inverting the algorithm with reference to Key 3.

S7' to S9'. The coefficient values are compared with Ts downloaded from the smart card. That allows the processor to determine which coefficients have a sign change.

Referring to Figures 7 and 8, steps S11 and S111 are followed as in the process
5 of changing the coefficients.

Referring to Figure 7, at S12 RN3 is regenerated from Key3 and is subtracted from the index.

Referring to Figure 8, at S13, the encryption is reversed using Key3'.

Referring to Figure 9;-

10 S14. The number of bits to entropy encode a sequence is determined.

S15. The change processor 7 attempts to find a permutation of the order of coefficients which does not change the number of bits required to be entropy encoded.

S16. If such a permutation is found, then it is possible that in the change process a decision was made to change the order. The decision depends on the value
15 of the pseudo random number PRB2 defined by Key4.

PRB2 indicates whether the sequence has been changed. If it has, the change is inverted.

Security

The algorithms used to apply the watermark may be common to many different
20 users. Security is provided by:

- a) the keys Key1, 2, 3, 4 and 5 which are chosen and generated by the users;
- b) the levels L which are chosen by the users; and
- c) the limits on RN1 which are chosen by the users.

The sign change threshold may provide some security because it is selectable
25 by the users.

The DC and AC templates are not secure if a visible watermark is applied to an image because the template is at least partially visible in the image.

Smart cards are physically and logically designed to store data securely.

Related system and method

30 The method and apparatus described herein may be used with the method and system disclosed in copending application 0029851.3, attorney file P/10406, I-00-153 the disclosure of which is incorporated herein by reference.

Table 1

VLC Group	Number of FLC Bits	Description
0	0	EOB code
1	1	$(1)*0, +/- 1$
2	2	$(2 \text{ to } 3)*0, +/- 1$
3	3	$(4 \text{ to } 7)*0, +/- 1$
4	4	$(8 \text{ to } 15)*0, +/- 1$
5	5	$(16 \text{ to } 31)*0, +/- 1$
6	6	$(32 \text{ to } 63)*0, +/- 1$
7	0	$(1)*0$
8	1	$(2 \text{ to } 3)*0$
9	2	$(4 \text{ to } 7)*0$
10	3	$(8 \text{ to } 15)*0$
11	4	$(16 \text{ to } 31)*0$
12	5	$(32 \text{ to } 63)*0$
13	1	$+/- 1$
14	2	$-3 \text{ to } -2, +2 \text{ to } +3$
15	3	$-7 \text{ to } -4, +4 \text{ to } +7$
16	4	$-15 \text{ to } -8, +8 \text{ to } +15$
17	5	$-31 \text{ to } -16, +16 \text{ to } +31$
18	6	$-63 \text{ to } -32, +32 \text{ to } +63$
19	7	$-127 \text{ to } -64, +64 \text{ to } +127$
20	8	$-255 \text{ to } -128, +128 \text{ to } +255$
21	14	$-8192 \text{ to } -256, +256 \text{ to } +8191$

In this table:

1. $(x \text{ to } y)*0, +/- 1$ means from "x" to "y" zero value coefficients followed by a coefficient of +1 or -1
2. $(x \text{ to } y)*0$ means from "x" to "y" zero value coefficients.

Adding a watermark to video which has previously been compressed.

The foregoing description applies a watermark to video during the process of compressing the material. However material is available which is compressed but does not have a watermark but it is desirable to add a watermark to it. Figure 14 is a schematic flow diagram of an illustrative system in accordance with the invention for processing video from a source 71 of compressed video. The source 71 may be a video tape player or player and recorder, a disc player or player and recorder, a server or any other source. For ease of explanation, and consistency with the foregoing description, it is assumed that the video has been compressed by a system as shown in Figure 1 but omitting the change processors 7e and 7o. The compressed video thus is not watermarked.

In this example, the compressed video comprises data encoded according to the coding set out in Table 1 at the end of this description. The data is analysed (72) to:

- 1) extract the individual codes. The non-zero AC coefficients each have the form <VLC> <FLC> as shown in Table 1. DC coefficients are encoded as raw data in n bits;
- 2) determine the positions in the bit map of Figure 3 which the codes represent; and
- 3) determine other information such as quantisation level of DC coefficients.

The entropy encoded bit stream is a stream of data organised in known manner and from which it is possible to identify the codes in known manner. The ordering of the codes is in a known relationship to the image positions.

A comparator 74 compares the code positions with the bit map stored in a template store 73 to determine whether the code needs to be changed or not.

If a code needs to be changed then step 75 determines whether the code represents an AC or DC coefficient. If the code represents an AC coefficient, then one of the methods of Figures 6 to 9 as described above is used. If the code represents a DC coefficient, then the method of Figure 5 as described above is used.

All the codes, that is both the changed and unchanged codes are stored in a store 76, for example a video tape recorder. The unchanged codes are fed to the store 76 via a delay 77 which compensates for the processing delay of the changed codes so that the order of the codes is unchanged in the examples of Figures 7 and 8.

If a compressed bit stream is required then the bitstream is stored in a store 76 without further processing. If an uncompressed bit stream is required the bitstream is decompressed and then stored.

- 5 This process for embedding a watermark in video which is already compressed is advantageous because it does not require the video to be decompressed: that is it does not need to be dequantised and does not need an inverse transform operation.

Removing the watermark

The watermark may be removed and the original video restored by the inverse of the method shown in Figure 14. The data from a source 71 is analysed (72) to:

- 10 a) extract the individual codes. The non-zero AC coefficients each have the form

<VLC> <FLC> as shown in Table 1. DC coefficients are encoded as raw data in n bits;

- b) determine the positions in the bit map of Figure 3 which the codes represent; and
c) determine other information such as quantisation level of DC coefficients.

- 15 The entropy encoded bit stream is a stream of data organised in known manner and from which it is possible to identify the codes in known manner. The ordering of the codes is in a known relationship to the image positions.

A comparator 74 compares the code positions with the bit map stored in a template store 73 to determine whether the code was changed or not during embedding

- 20 If a code was changed then step 75 determines whether the code represents an AC or DC coefficient. If the code represents an AC coefficient, then one of the methods of Figures 12 and 7 to 9 as described above is used to remove the modification. If the code represents a DC coefficient, then the method of Figure 5 as described above is used for removal..

- 25 All the codes, that is both the changed and unchanged codes are stored in a store 76, for example a video tape recorder. The unchanged codes are fed to the store 76 via a delay 77 which compensates for the processing delay of the changed codes so that the order of the codes is unchanged in the examples of Figures 7 and 8.

- 30 If a compressed bit stream is required then the bitstream is stored in a store 76 without further processing. If an uncompressed bit stream is required the bitstream is decompressed and then stored.

Modifications

Although the invention has been described by way of example with reference to information signals recorded on tape, any other suitable storage media may be used, for example, disc stores and solid state stores:

5 In the examples of Figures 1 to 14, the video is compressed according to one particular example of a compression system. The invention is not limited to that one example. The invention may be applied to many other compression systems including HDCAM, MPEG, JPEG, Motion JPEG, and DV.

10 In the examples of Figures 1 to 13, the watermark is fixed in image space and, except for the minor variation provided in video by RN2 in the example of Figure 4, does not vary in time. The invention is not limited to that. The watermark may vary in image space with time in a video sequence. One way of doing that is to provide a plurality of bit maps (also referred to herein as templates) which define watermarks in different positions and to use the bit maps in succession. Also the different bit maps may define different levels L: see Figure 3B and step S1 of Figure 4, so that the watermark has a
15 varying level of visibility with time.

JPEG is mentioned above as an example of a compression system to which the invention may be applied. The examples of the invention aim to embed a watermark in compressed digital information signals without increasing the number of bits used to represent the compressed information signals as compared to the same compressed
20 information signals without the embedded watermark. If the examples of the invention are applied to JPEG, there may be a small change in the number of bits. This is because JPEG uses predetermined control characters which may be accidentally produced by application of the examples of the present invention. If this happens the JPEG algorithm automatically adds an extra byte to avoid this problem. The result may
25 be to increase or decrease the number of bits. Also, to make the modification more visible, a small increase in the number of bits may be acceptable, especially when stored on discs and other non-tape formats.

Although the foregoing description refers to video, the invention is not limited to video. It may be applied to audio, still images and other information signals.

Table 1.

VLC Group	Number of FLC Bits	Description
0	0	EOB code
1	1	$(1)*0, +/- 1$
2	2	$(2 \text{ to } 3)*0, +/- 1$
3	3	$(4 \text{ to } 7)*0, +/- 1$
4	4	$(8 \text{ to } 15)*0, +/- 1$
5	5	$(16 \text{ to } 31)*0, +/- 1$
6	6	$(32 \text{ to } 63)*0, +/- 1$
7	0	$(1)*0$
8	1	$(2 \text{ to } 3)*0$
9	2	$(4 \text{ to } 7)*0$
10	3	$(8 \text{ to } 15)*0$
11	4	$(16 \text{ to } 31)*0$
12	5	$(32 \text{ to } 63)*0$
13	1	$+/- 1$
14	2	$-3 \text{ to } -2, +2 \text{ to } +3$
15	3	$-7 \text{ to } -4, +4 \text{ to } +7$
16	4	$-15 \text{ to } -8, +8 \text{ to } +15$
17	5	$-31 \text{ to } -16, +16 \text{ to } +31$
18	6	$-63 \text{ to } -32, +32 \text{ to } +63$
19	7	$-127 \text{ to } -64, +64 \text{ to } +127$
20	8	$-255 \text{ to } -128, +128 \text{ to } +255$
21	14	$-8192 \text{ to } -256, +256 \text{ to } +8191$

CLAIMS

1. A method of modifying material represented by information signals, comprising deriving digital representations of transform coefficients of the information signals, and modifying and entropy encoding the digital representations, wherein at least some of the digital representations are modified by making pseudo random changes to them in accordance with a substantially invertible algorithm, which changes do not substantially change the number of entropy encoded bits.
2. A method according to claim 1, wherein the modifications do not represent data.
- 10 3. A method according to claim 1 or 2, wherein the transform coefficients are quantised.
4. A method according to claim 1, 2 or 3 wherein the changes are perceptible in the material.
5. A method according to claim 1, 2, 3 or 4 wherein a group of the said representations is pseudo randomly changed by determining whether one or more transpositions of the representations of the group exist which do not increase the number of entropy encoded bits and selecting the, or one of the, transposed groups or the untransposed group in accordance with the value of a pseudo random number.
- 15 6. A method according to claim 1, 2, 3 or 4, which comprises the steps of:
defining, for each representation, a set of representations of similar magnitude of which that representation is a member, and a member of a set to be modified is modified by pseudo randomly transposing that member with another member of the set in accordance with a predetermined transposition algorithm, thereby to modify the material without substantially changing the number of entropy encoded bits.
- 20 7. A method according to claim 6, wherein if a representation of value $N1$ is to be changed by an amount X , it is transposed with another member of value $N2$ of the set where $|N1-N2| = X$, and X is a pseudo random value selected according to the invertible algorithm.
- 25 8. A method according to claim 7, wherein a said set comprises members whose maximum and minimum values differ by about $2X$.
- 30

9. A method according to claim 7 or 8, wherein X is dependent on a proportion P, where $0 \leq P \leq 1$, of the value of a pseudo random number RN1 where the proportion P equals a value L/M where L represents a predetermined, selected, level and M equals the maximum allowable value of L.
- 5 10. A method according to claim 9, wherein X is varied in dependence on a pseudo random number RN2.
11. A method according to claim 6, wherein a representation comprises a group code indicating the magnitude group of the representation, and an index code indicating the position of the representation in the group and the representation is
- 10 transposed by replacing the index code of the representation by another index code in
the same group and chosen pseudo randomly according to the invertible algorithm.
12. A method according to any one of claims 1 to 11, wherein the deriving step comprises receiving digital representations of samples of the material, and applying a transform thereto to derive transform coefficients, and quantising the
- 15 transform coefficients.
13. A method according to any one of claims 1 to 11, wherein the deriving step comprises receiving an entropy encoded bitstream representing transform coefficients and extracting from the bitstream codes which represent the coefficients.
14. A method according to any preceding claim, comprising the step of
- 20 selecting a part or parts of the material which is to be modified.
15. A method according to claim 14, comprising storing a bit map of the part or parts of the material which are to be modified and selecting a part or parts to be modified in accordance with the map.
16. A method according to claim 15, when directly or indirectly dependent
- 25 on claim 9, wherein the bit map stores one or more values of the level L.
17. A method according to claim 16, wherein the bit map stores different values of L for different parts of the material.
18. A method according to claim 14, 15, 16 or 17, wherein the coefficients are grouped in blocks, the selecting step comprising selecting blocks of coefficients the
- 30 representations of which are to be changed

19. A method according to claim 18, wherein the blocks each comprise DC and AC coefficients and the selecting step selects AC coefficients for change in some blocks and DC coefficients for change in other blocks.
20. A method according to claim 19, wherein DC coefficients are modified
5 differently to AC coefficients.
21. A method according to any one of claims 1 to 20, wherein the said transform coefficients are DCT coefficients.
22. A computer program product providing computer executable instructions, which when loaded onto a data processor configures the data processor to operate
10 according to the method of any one of claims 1 to 21.
23. Apparatus arranged to carry out the method of any one of claims 1 to 21
24. A method of removing modifications applied to information signals representing material by the method of claim 1, comprising deriving entropy encoded digital representations of the transform coefficients, extracting codes representing the
15 digital representations and applying the inverse of the invertible algorithm to the codes.
25. A method according to claim 24 wherein the said digital representations are quantised transform coefficients.
26. A method according to claim 24 or 25 of removing modifications applied to
20 information signals representing material by the method of claim 5, the method comprising determining whether one or more transpositions of the representations of the group exist which do not increase the number of entropy encoded bits and selecting the, or one of the, transposed groups or the untransposed group in accordance with the value of a pseudo random number.
- 25 27. A method according to claim 26, wherein the pseudo random number is derived from a key.
28. A method according to claim 24 or 25 of removing modifications applied by the method of claim 6, comprising the steps of defining, for each modified representation, a set of representations of similar magnitude of which that
30 representation is a member, and a member of a set to be restored to its unmodified value is changed by pseudo randomly transposing that member with another member

of the set in accordance with the inverse of the said predetermined transposition algorithm.

29. A method according to claim 28 wherein if a representation of value N1 is to be changed by an amount X, it is transposed with another member of value N2 of the set where $|N1 - N2| = X$, and X is a pseudo random value selected according to the said inverse algorithm.

30. A method according to claim 29, wherein a said set comprises members whose maximum and minimum values differ by about 2X.

31. A method according to claim 29 or 30, wherein X is dependent on a proportion P, where $0 \leq P \leq 1$, of the value of a pseudo random number RN1 where the proportion P equals a value L/M where L represents a predetermined, selected, level and M equals the maximum allowable value of L.

32. A method according to claim 31, wherein X is varied in dependence on a pseudo random number RN2.

33. A method according to claim 28, wherein a representation comprises a group code indicating the magnitude group of the representation, and an index code indicating the position of the representation in the group and the representation is transposed by replacing the index code of the representation by another index code in the same group and chosen pseudo randomly according to the inverse algorithm.

34. A method according to any one of claims 24 to 33, comprising the step of determining for each representation whether it has been subject to modification by reference to data indicating the representations which have been modified and selecting for change those representations which were modified.

35. A method according to claim 34, wherein the said data is a bit map.

36. A method according to claim 35 when directly or indirectly dependent on claim 31 or 32, wherein the bit map stores one or more values of L.

37. A method according to claim 36, wherein the bit map stores different values of L for different parts of the material.

38. A method according to claim 34, 35, 36 or 37, wherein the coefficients are grouped in blocks, the selecting step comprising selecting blocks of coefficients the representations of which are to be changed.

39. A method according to claim 38, wherein the blocks each comprise DC and AC coefficients and the selecting step selects AC coefficients for change in some blocks and DC coefficients for change in other blocks.

40. A method according to claim 39, wherein DC coefficients are changed
5 differently to AC coefficients.

41. A method according to any one of claims 26 to 40, wherein the said transform coefficients are DCT coefficients.

42. A method according to any one of claims 24 to 41, comprising the step
10 of downloading, from a data carrier, inverse change data required to remove the modification.

43. A computer program product providing computer executable instructions, which when loaded onto a data processor configures the data processor to operate according to the method of any one of claims 24 to 42.

44. Apparatus arranged to operate in accordance with the method of any
15 one of claims 24 to 42.

45. Apparatus for modifying material represented by information signals, comprising a processor arrangement operable to derive digital representations of transform coefficients of the information signals and to modify and entropy encode the coefficients, wherein the processing arrangement is operable to modify the
20 representations by making pseudo random changes to them in accordance with a substantially invertible algorithm, which changes do not substantially change the number of entropy encoded bits.

46. Apparatus according to claim 45, comprising a transform processor for deriving digital representations of transform coefficients derived from the digital
25 information signals; and
a change processor for modifying, and entropy encoding, the said digital representations of the transform coefficients.

47. Apparatus according to claim 45 or 46 wherein the processing arrangement is operable to make changes which are perceptible in the material.

30 48. Apparatus according to claim 45, 46 or 47, wherein the processing arrangement is operable such that a group of representations is pseudo randomly

changed by determining whether one or more transpositions of the representations of the group exist which do not substantially change the number of entropy encoded bits and selecting the, or one of the, transposed groups or the untransposed group in accordance with the value of a pseudo random number.

5 49. Apparatus according to claim 45, 46 or 47, wherein the processing arrangement is operable to define, for each representation, a set of representations of similar magnitude of which that representation is a member, and a member of a set to be modified is modified by pseudo randomly transposing that member with another member of the set in accordance with a predetermined transposition algorithm,
10 thereby to modify the material without substantially changing the number of entropy encoded bits.

50. Apparatus according to claim 49 wherein if a representation of value N1 is to be changed by an amount X, it is transposed with another member of value N2 of the set where $|N1-N2| = X$, and X is a pseudo random value selected according to
15 the invertible algorithm.

51. A method according to claim 50, wherein a said set comprises members whose maximum and minimum values differ by about 2X.

52. Apparatus according to claim 50 or 51, wherein X is dependent on a proportion P, where $0 \leq P \leq 1$, of the value of a pseudo random number RN1 where
20 the proportion P equals a value L/M where L represents a predetermined, selected, level and M equals the maximum allowable value of L.

53. Apparatus according to claim 52, wherein X is varied in dependence on a pseudo random number RN2.

54. Apparatus according to claim 49, wherein a representation comprises a group
25 code indicating the magnitude group of the representation, and an index code indicating the position of the representation in the group and the representation is transposed by replacing the index code of the representation by another index code in the same group and chosen pseudo randomly according to the invertible algorithm.

55. Apparatus according to any one of claims 45 to 54, wherein the
30 processing arrangement is operable to receive digital representations of samples of the material, and applying a transform thereto to derive transform coefficients, and quantise the transform coefficients.

56. Apparatus according to any one of claims 45 to 54, wherein the processing arrangement is operable to a bit stream representing entropy encoded transform coefficients and to extract therefrom codes representing the coefficients.
- 5 57. Apparatus according to any one of claims 45 to 56, wherein the processing arrangement is operable to select a part or parts of the material which is to be modified.
58. Apparatus according to claim 57, wherein the processing arrangement is operable to store a bit map of the portions of the material which are to be modified
- 10 and select portions to be modified in accordance with the map.
-
59. Apparatus according to claim 58, when directly or indirectly dependent on claim 52, wherein the bit map stores one or more values of the level L.
60. Apparatus according to claim 59, wherein the bit map stores different values of L for different parts of the material.
- 15 61. Apparatus according to claim 57, 58, 59 or 60, wherein the processing arrangement groups coefficients in blocks, and selects blocks of coefficients the representations of which are to be changed.
62. Apparatus according to claim 61, wherein the blocks each comprise DC and AC coefficients and the change processor selects AC coefficients for change in some
- 20 blocks and DC coefficients for change in other blocks.
63. Apparatus according to claim 62, wherein DC coefficients are modified differently to AC coefficients.
64. Apparatus according to any one of claims 45 to 63, wherein the said
- 25 processing arrangement is operable to produce DCT coefficients.
65. A computer program product providing computer executable instructions, which when loaded onto a data processor configures the data processor to operate as the apparatus of any one of claims 45 to 64.
66. Apparatus for removing modifications applied to information signals
- 30 representing material by the apparatus of claim 45, comprising a decoder for deriving a bit stream representing entropy encoded digital representations of the transform

coefficients of the modified material, and for extracting from the bitstream codes representing the coefficients and an inverse change processor for applying the inverse of the invertible algorithm thereto.

67. Apparatus according to claim 66 for removing modifications applied to information signals representing material by the apparatus of claim 48, wherein the inverse change processor is operable to determine whether one or more transpositions of the representations of the group exist which do not substantially change the number of entropy encoded bits and to select the, or one of the, transposed groups or the untransposed group in accordance with the value of a pseudo random number.

10 68. Apparatus according to claim 67, wherein the pseudo random number is derived from a key.

69. Apparatus according to claim 66 for removing modifications applied by the apparatus of claim 49, wherein the inverse change processor is operable to define, for each modified representation, a set of representations of similar magnitude of which that representation is a member, and a member of a set to be restored to its unmodified value is changed by pseudo randomly transposing that member with another member of the set in accordance with the inverse of the said predetermined transposition algorithm.

70. Apparatus according to claim 69 wherein if a representation of value N1 is to be changed by an amount X, it is transposed with another member of value N2 of the set where $|N1 - N2| = X$, and X is a pseudo random value selected according to the said inverse algorithm.

71. Apparatus according to claim 70, wherein a said set comprises members whose maximum and minimum values differ by about 2X.

25 72. Apparatus according to claim 69 or 70, wherein X is dependent on a proportion P, where $0 \leq P \leq 1$, of the value of a pseudo random number RN1 where the proportion P equals a value L/M where L represents a predetermined, selected, level and M equals the maximum allowable value of L.

73. Apparatus according to claim 70, 71 or 72, wherein X is varied in dependence on a pseudo random number RN2.

74. Apparatus according to claim 69, wherein a representation comprises a group code indicating the magnitude group of the representation, and an index code

indicating the position of the representation in the group and the representation is transposed by replacing the index code of the representation by another index code in the same group and chosen pseudo randomly according to the inverse algorithm.

75. Apparatus according to any one of claims 66 to 74, wherein the inverse change processor is operable to determine for each representation whether it has been subject to modification by reference to data indicating the representations which have been modified and selecting for change those representations which were modified.

76. Apparatus according to claim 75, wherein the said data is a bit map.

77. Apparatus according to claim 76 when directly or indirectly dependent on claim 72, wherein the bit map stores one or more values of L.

78. Apparatus according to claim 77, wherein the bit map stores different values of L for different parts of the material.

79. Apparatus according to claim 75, 76, 77 or 78, wherein the inverse change processor is operable to group the coefficients in blocks, and to select blocks of coefficients the representations of which are to be changed.

80. Apparatus according to claim 79, wherein the blocks each comprise DC and AC coefficients and the inverse change processor is operable to select AC coefficients for change in some blocks and DC coefficients for change in other blocks.

81. Apparatus according to claim 80, wherein DC coefficients are changed differently to AC coefficients.

82. Apparatus according to any one of claims 66 to 81, wherein the said transform coefficients are DCT coefficients.

83. A data carrier storing a template defining locations in material which are to be modified, and other data required to apply the modification(s).

84. A data carrier storing a template defining locations in material which are to be modified, and other data required to remove the modification(s).

85. A carrier according to claim 83 or 84, wherein the said other data includes at least one security keys for generating a pseudo random number.

86. A carrier according to claim 85, wherein the said other data includes at least data relating to limits on the value of the pseudo random number.

87. A carrier according to claim 83, 84, 85 or 86, wherein the said other data includes data relating to the magnitude of the modification(s).

88. A camera/recorder including apparatus according to any one of claims 45 to 64.

5 89. A system comprising apparatus according to any one of claims 45 to 64, apparatus according to any one of claims 66 to 83, and a data carrier according to any one of claims 83 to 87.

90. A method of modifying material substantially as herein before described with reference to Figures 1 to 9 of the accompanying drawings.





10 91. A method of removing a modification from material substantially as herein
before described with reference to Figures 11,12 and 14 and Figures 4, 5 and 7 to 9 of the accompanying drawings.



92. Apparatus for modifying material substantially as herein before described with reference to Figures 1 to 9 of the accompanying drawings .

15 93. Apparatus for removing a modification from material substantially as herein before described with reference to Figures 11,12 and 14 and Figures 4, 5 and 7 to 9 of the accompanying drawings.

ABSTRACT**WATERMARKING MATERIAL**

Material is represented by transform coefficients represented by digital
5 numbers. A method of perceptibly watermarking the material comprises the steps of:
changing representations of the said numbers according to an invertible algorithm
without changing the number of bits in the said numbers; and encoding the changed n
bit numbers to effect compression encoding of the material.

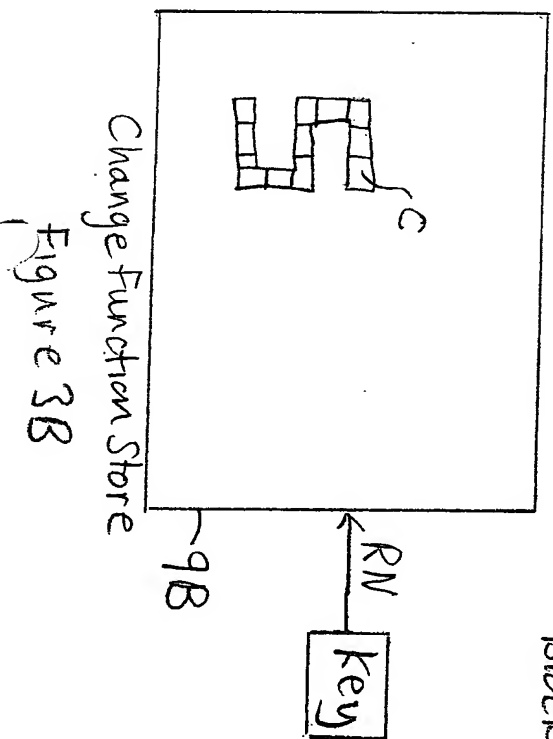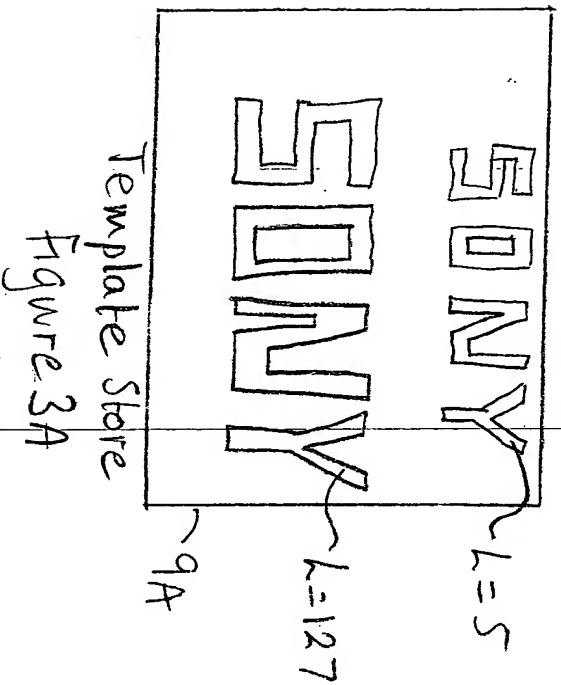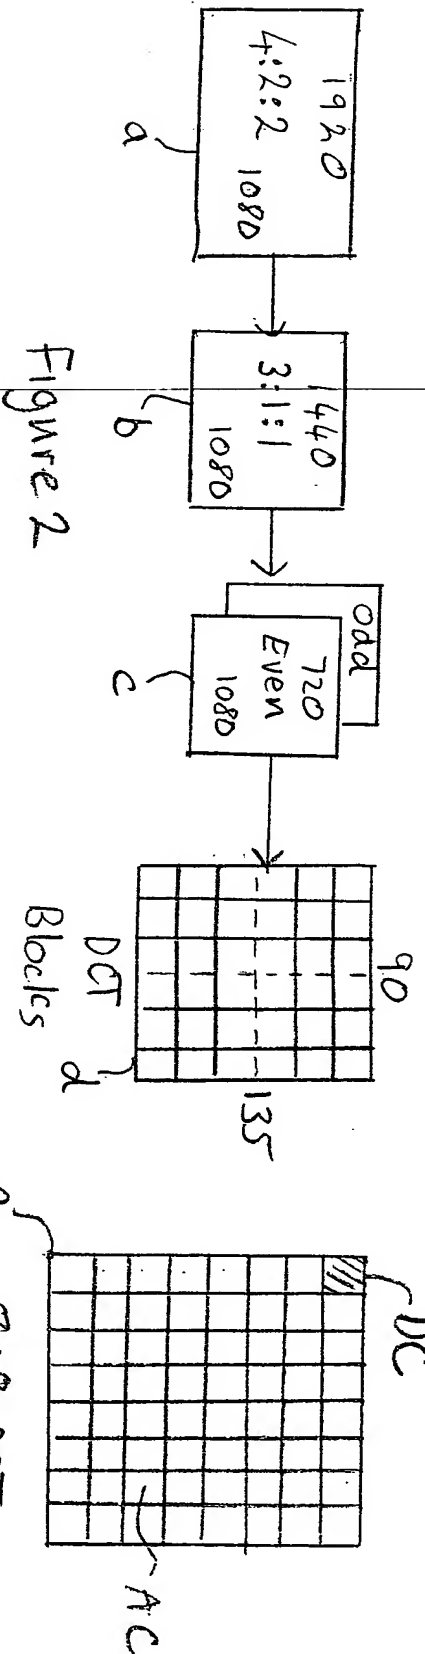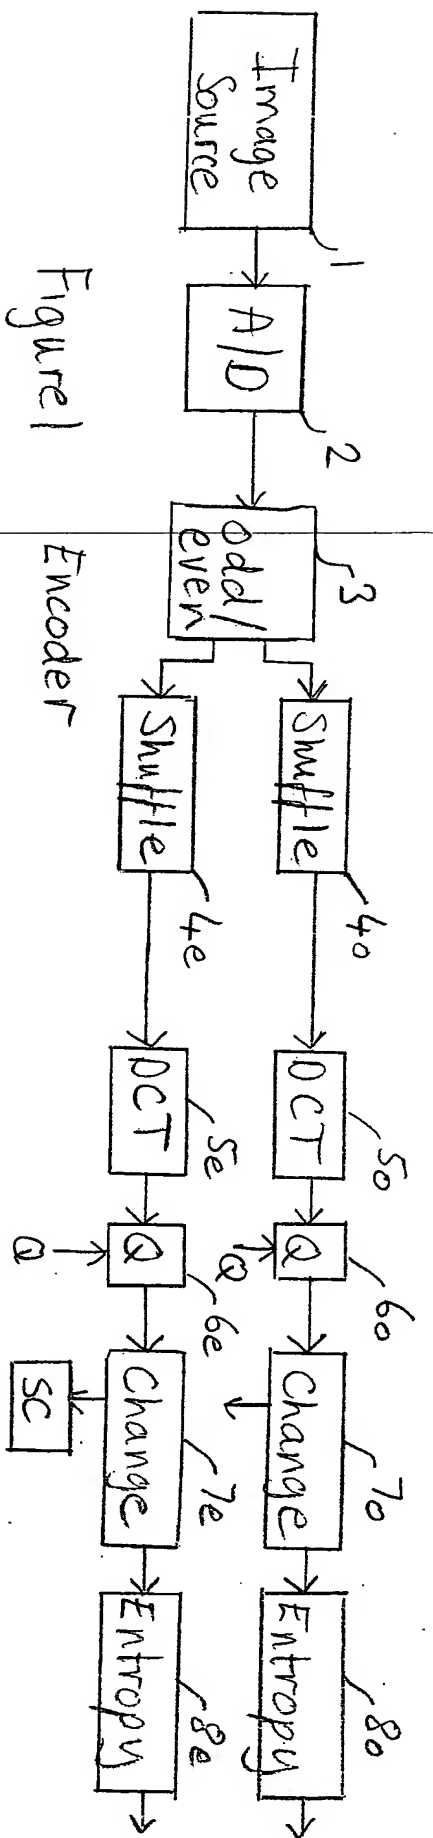

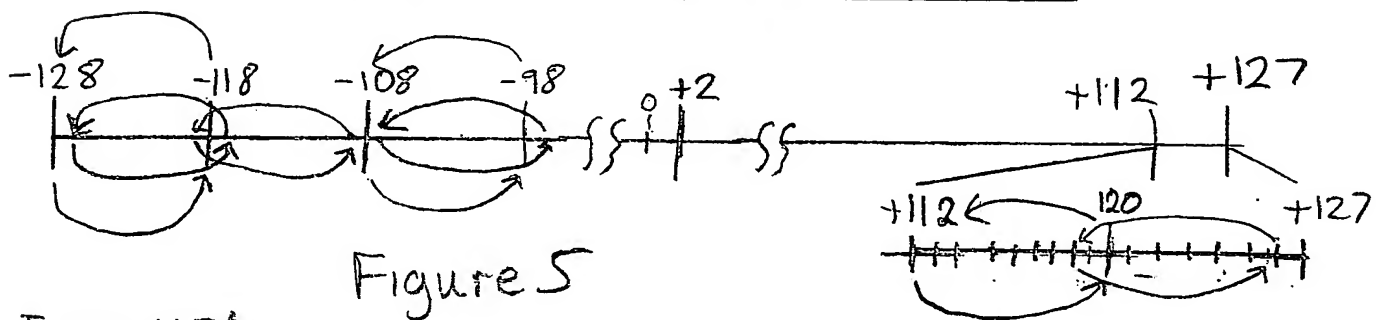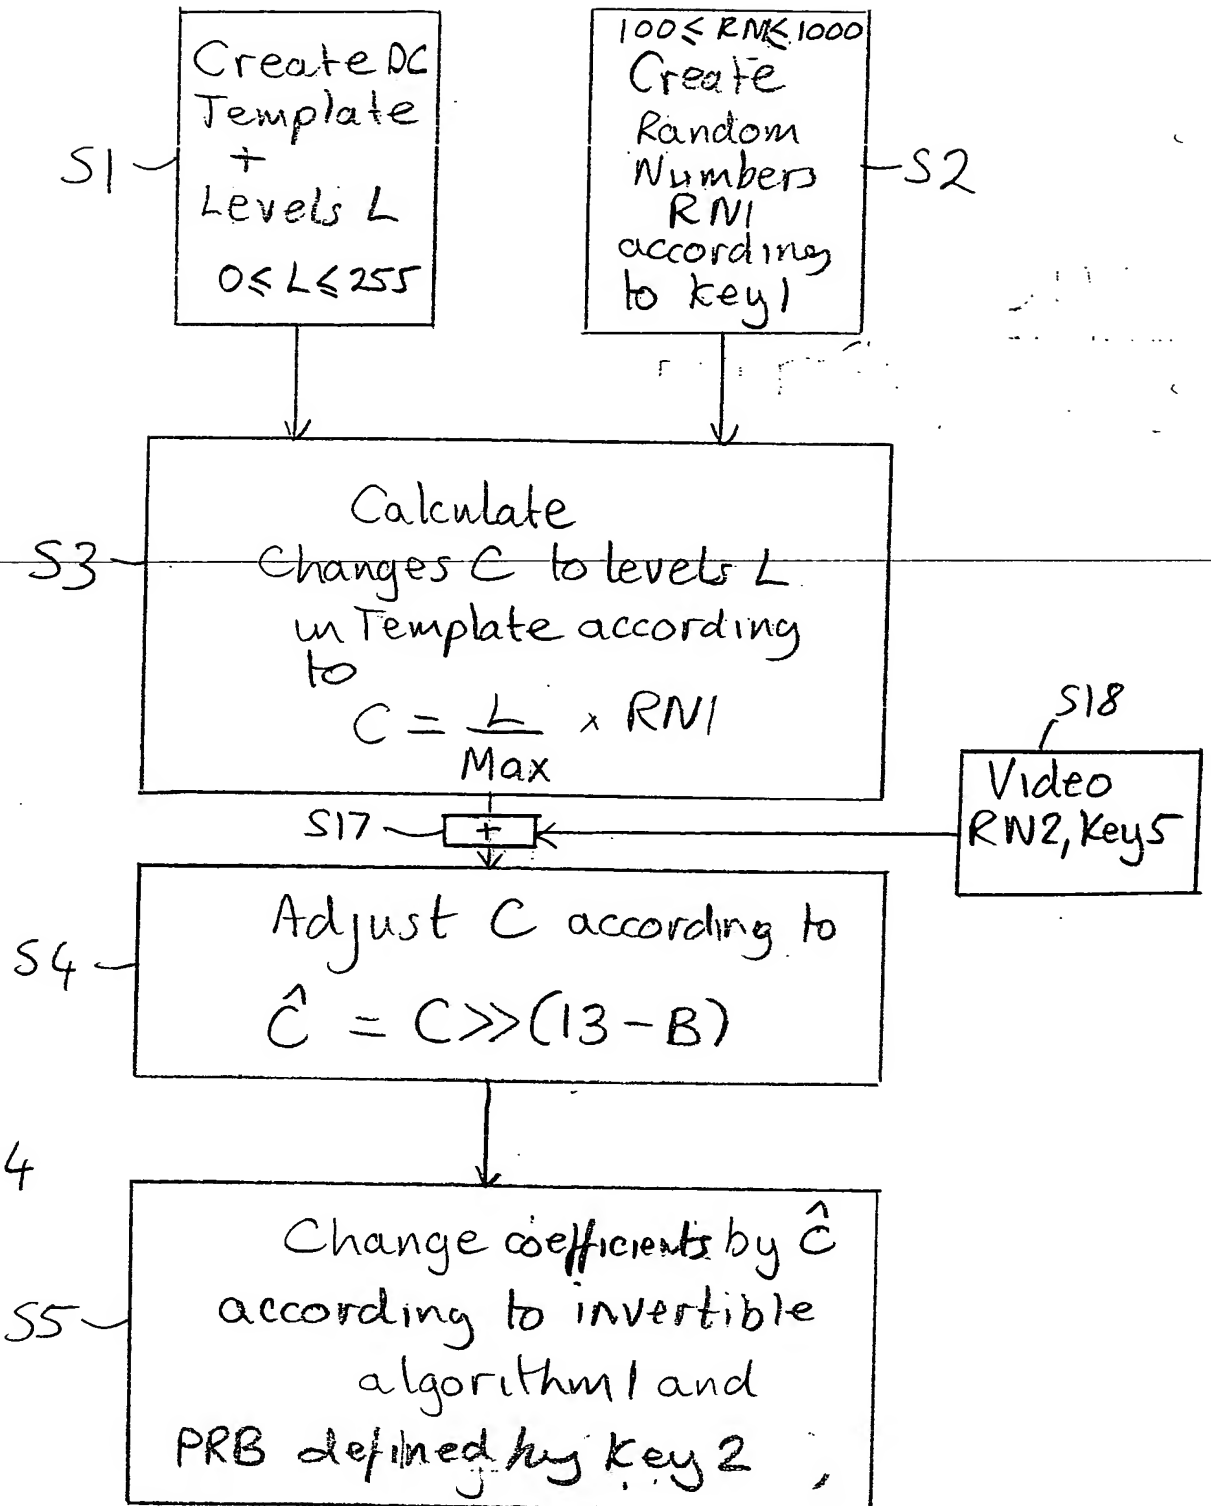

3/8

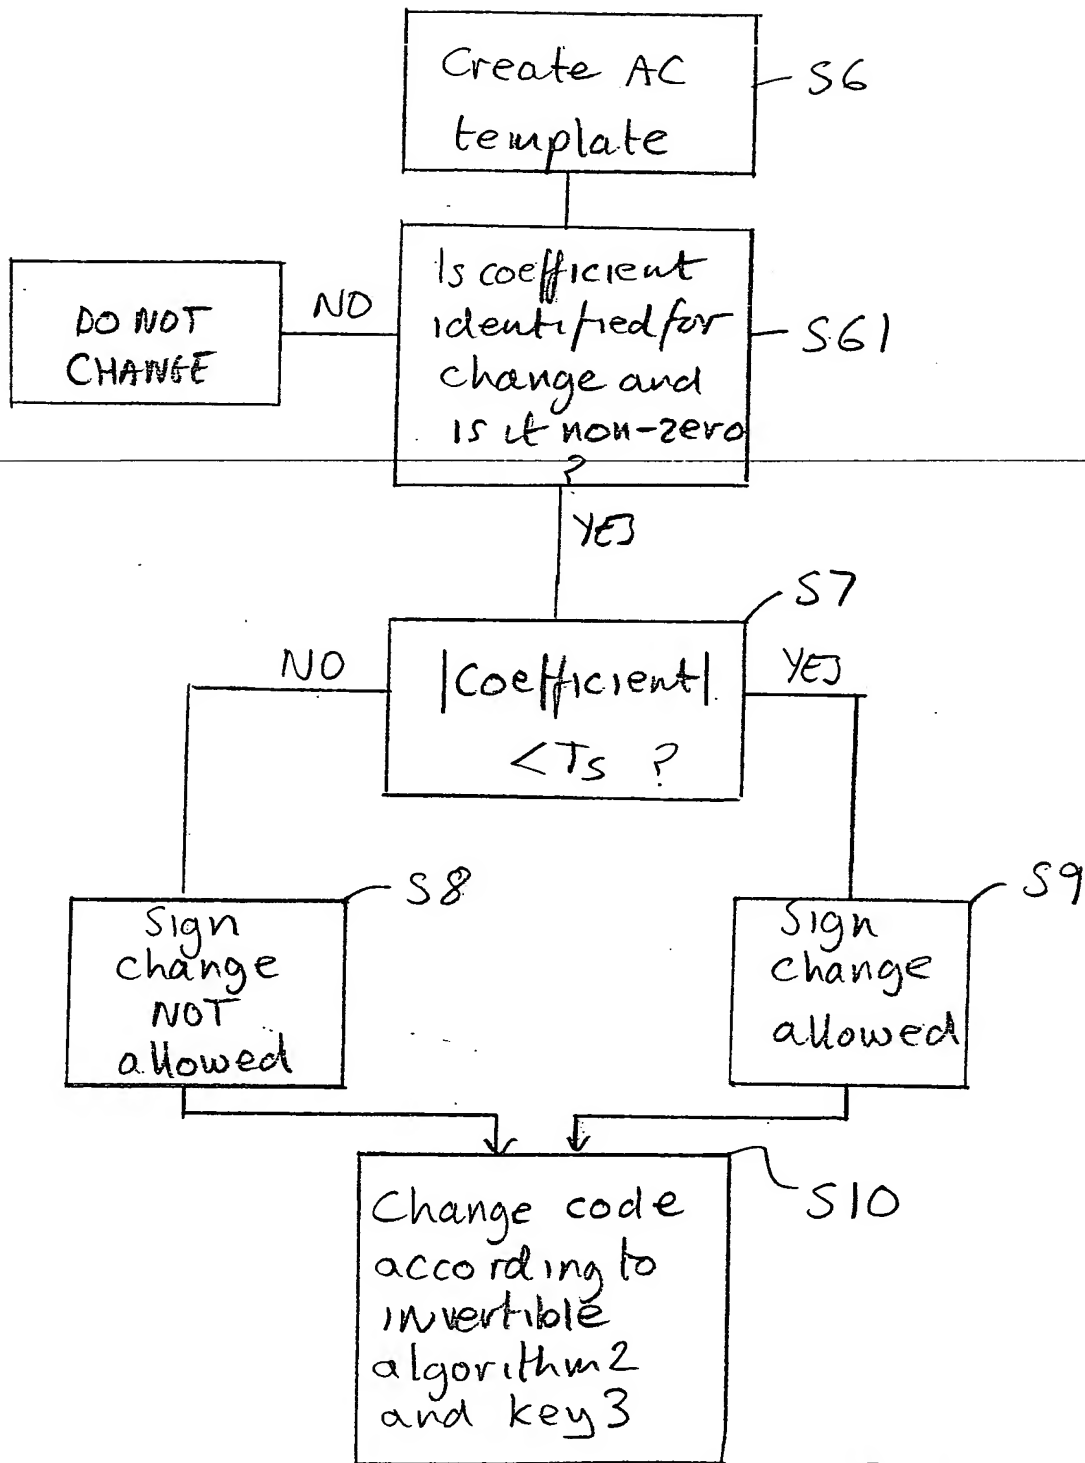


Figure 6

4/8


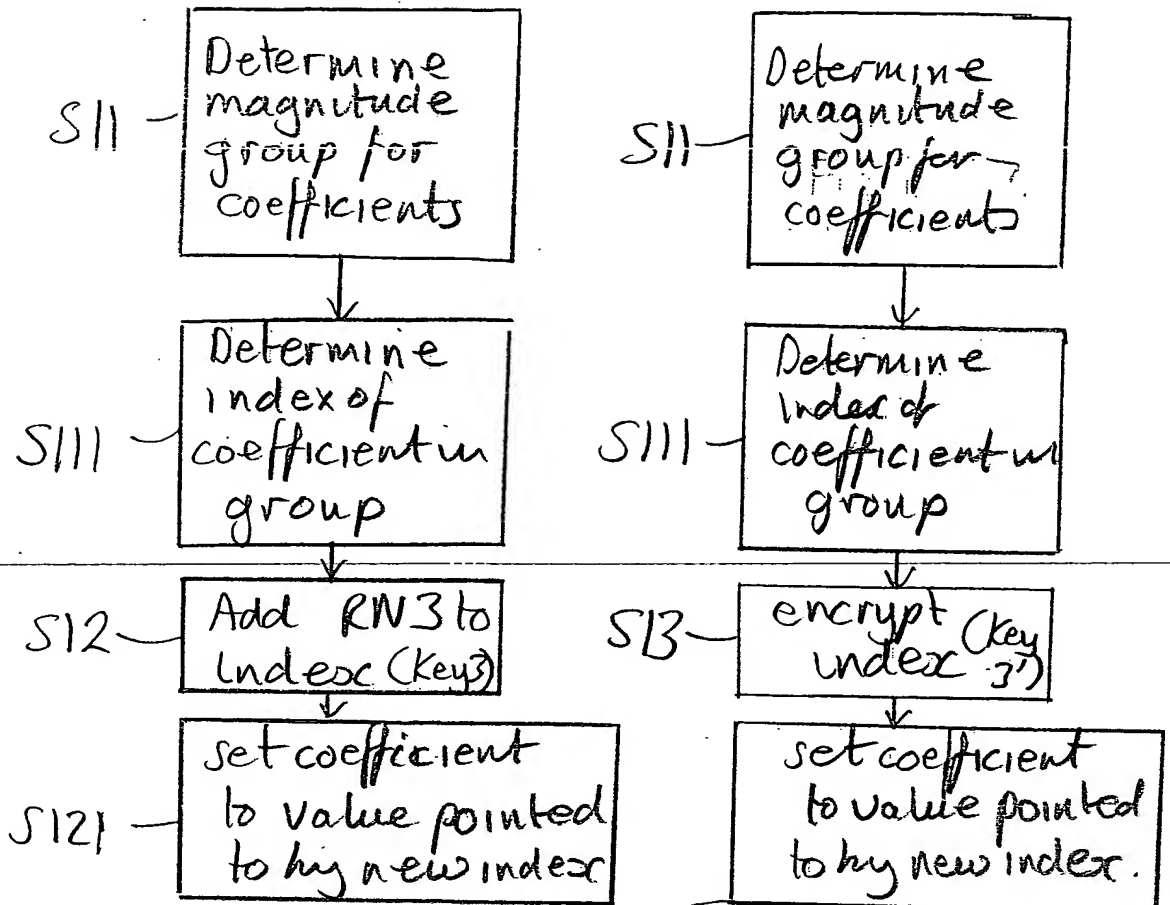


Figure 7

S121 Figure 8

Figure 9

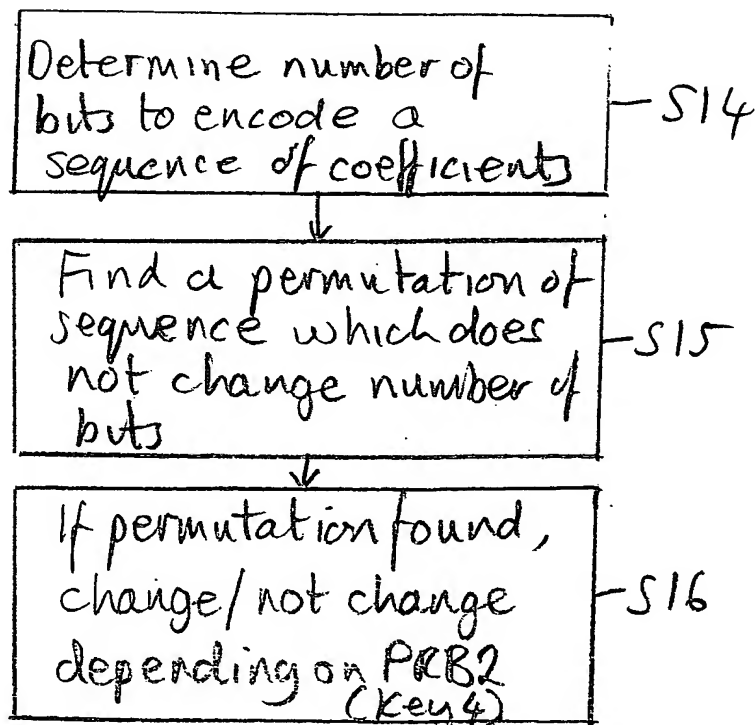

5/8

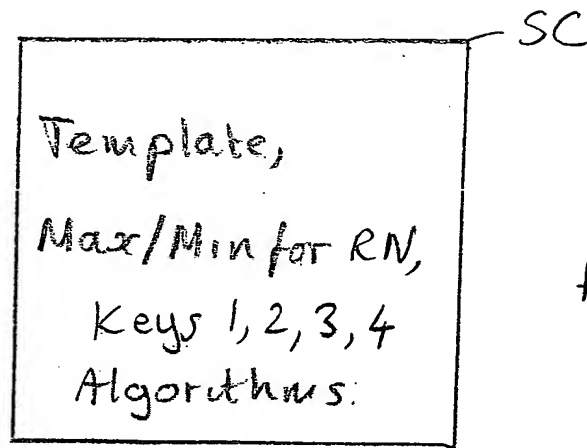
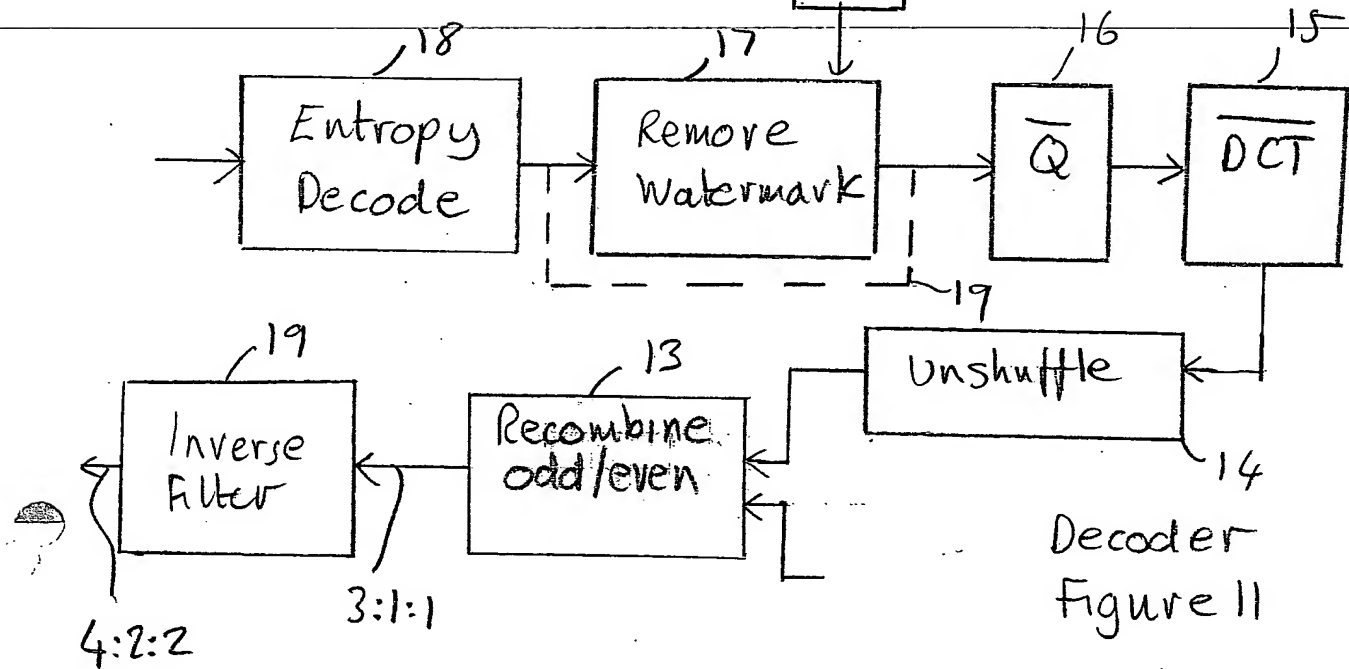


Figure 10

Smart Card

SC




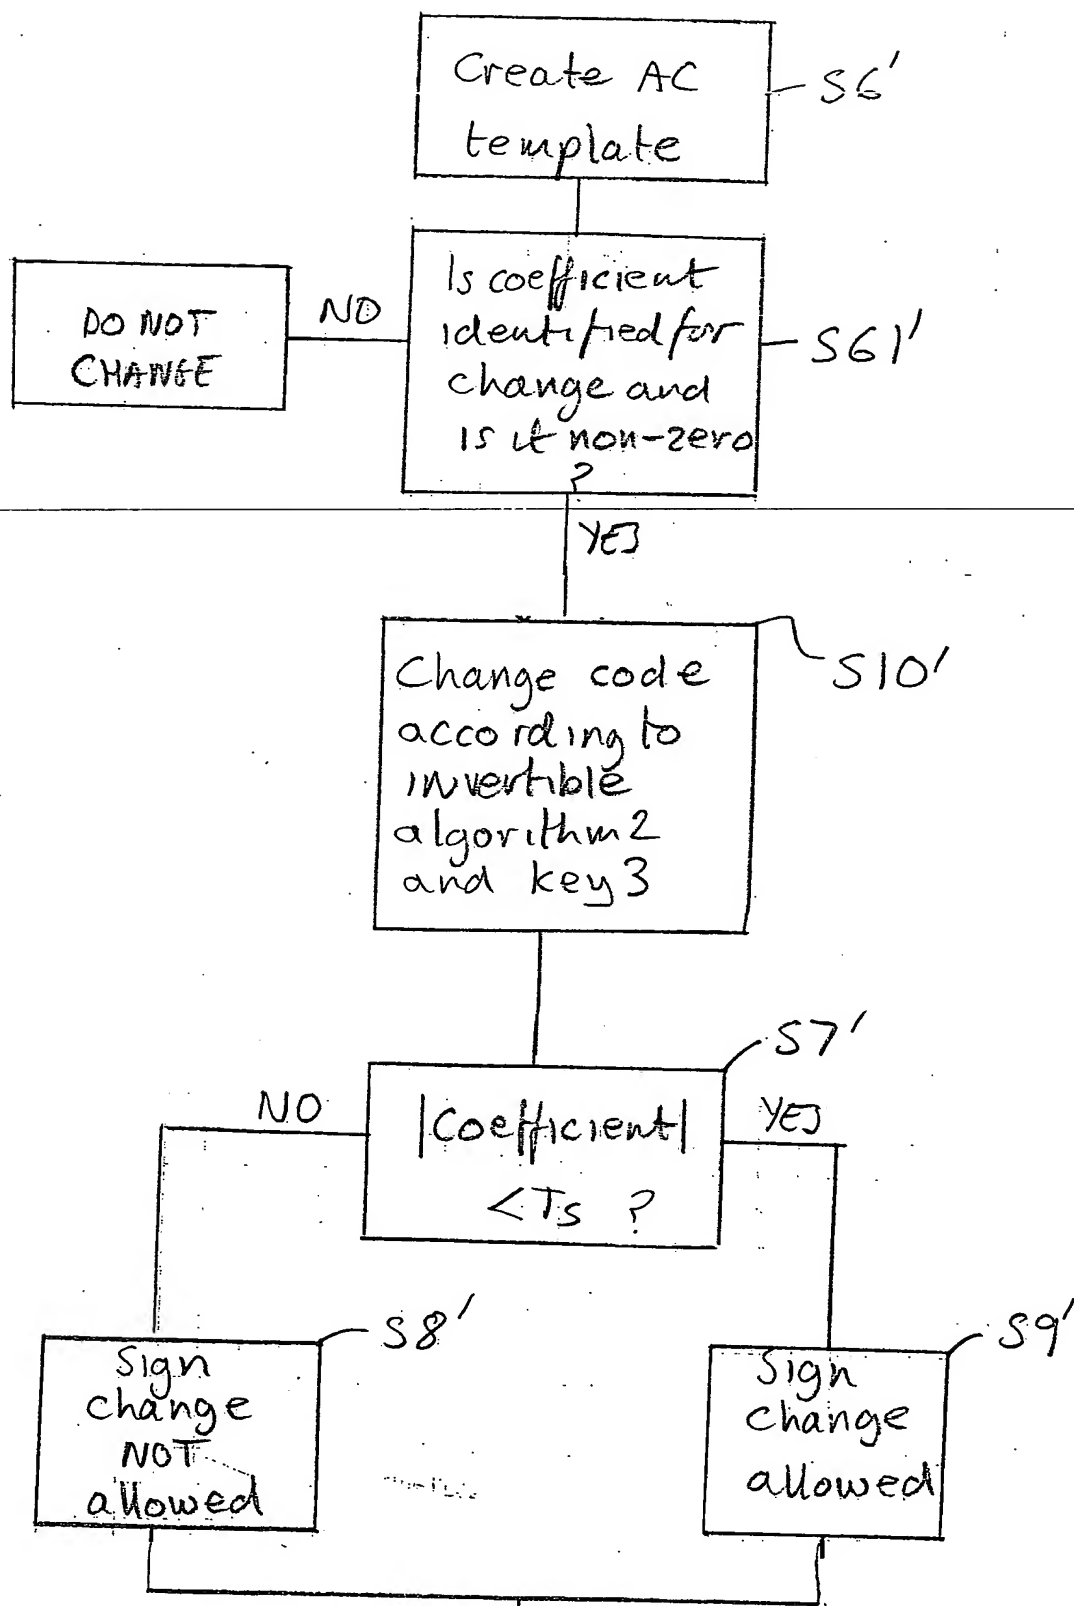


Figure 12

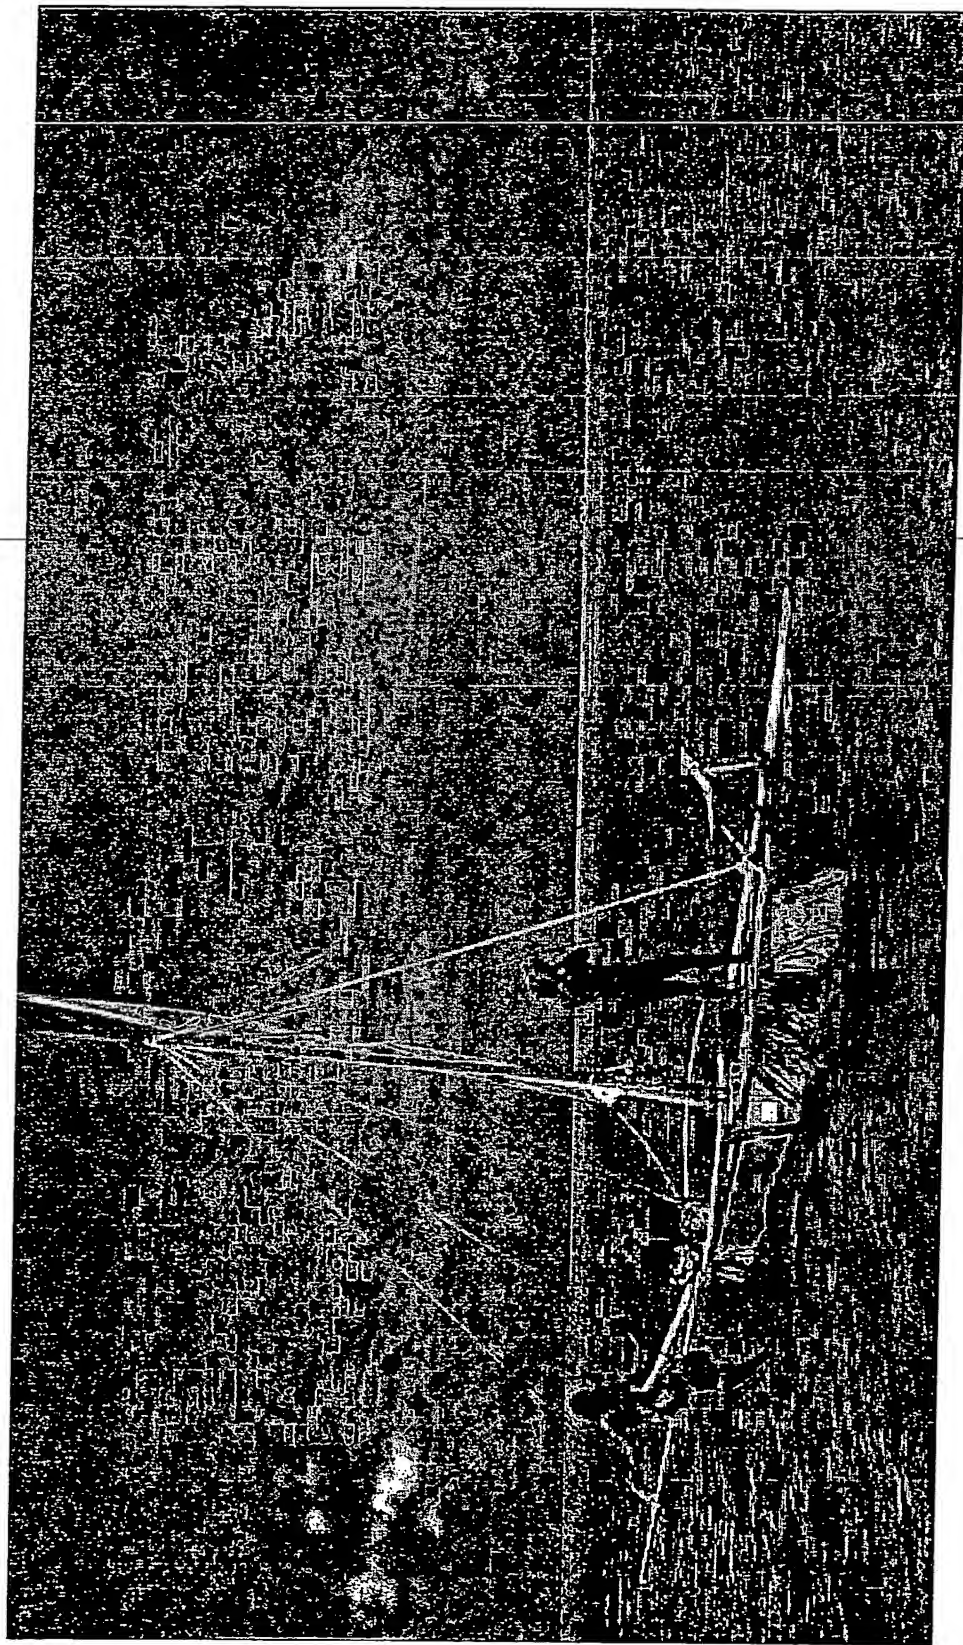

Example Watermarked Image.

Figure 13

8/8

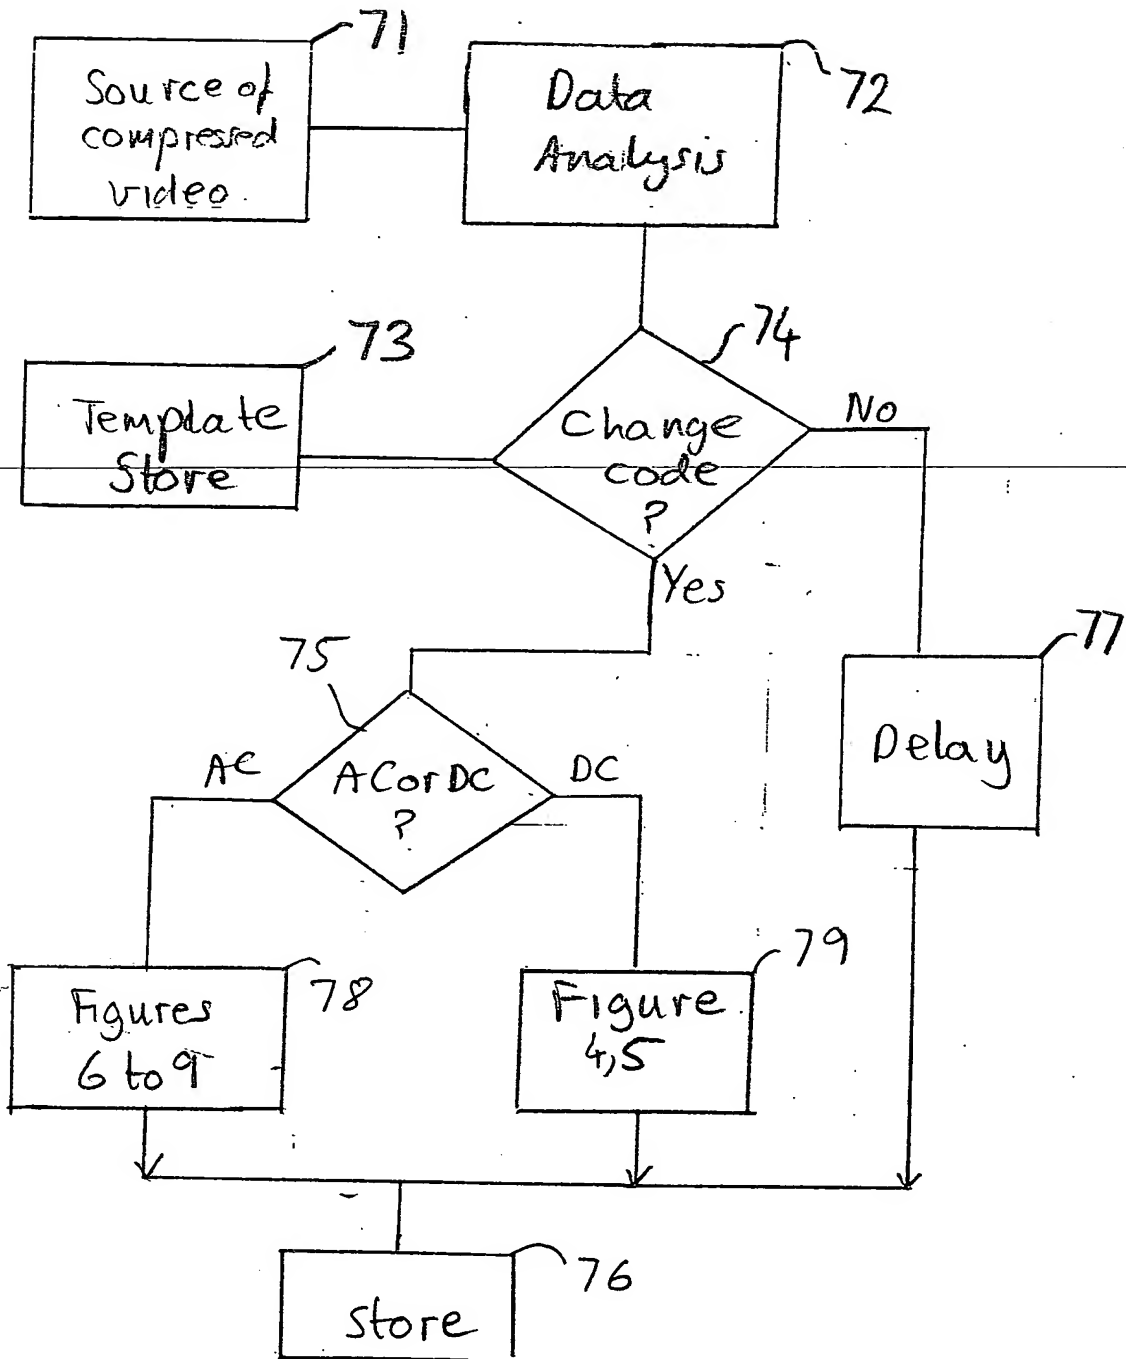


Figure 14

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.